
INVIZIBO

CUSTOM INSTALLATION SERIES






Invizibo Series

YOUR AESTHETICS AR'S IMPECCABLE SOUND

As the name suggests, our new Invizibo Series™ speakers are painstakingly designed to deliver AR's legendary listening experience, yet without intruding on your home's décor. It's movies and music, made *Invizibo*.

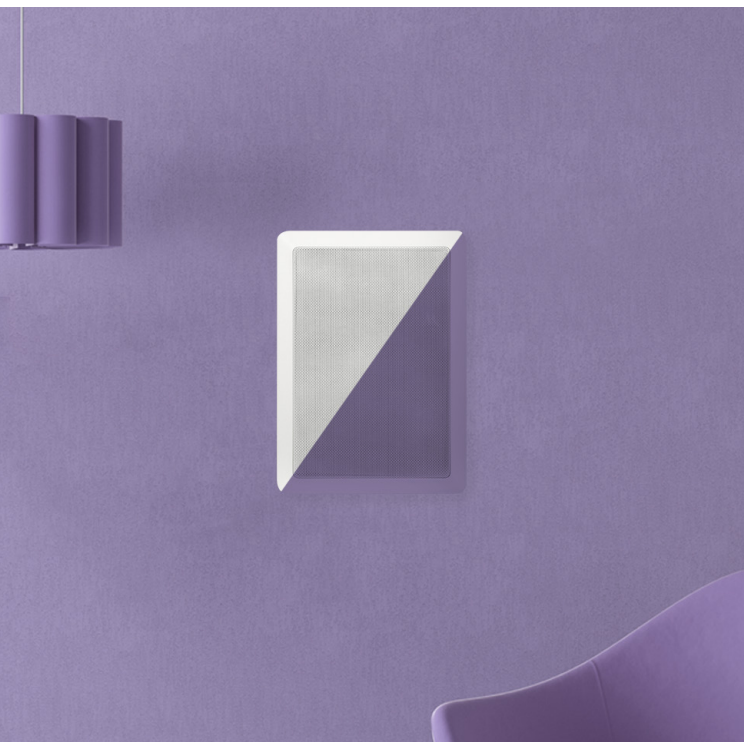


VIRTUALLY INVIZIBO™

Neutral, soft-white finished frame and fine perforated grille blends imperceptibly into any room's wall surface. Simply paint to match, hide behind fabric accents, or install behind a perforated theater projection screen for a chic and stealthy home theater.

LIFELIKE MOVIES AND MUSIC AWAITS YOU



Light, yet with extreme rigidity, our new Kevlar® woofer* cones' skin delivers clear and natural low distortion mid-range sound even during high volume play. Meanwhile AR's silk dome tweeters utilize titanium-fiber thread to help produce outstanding highs with precise imaging. Not your typical "in-wall" speakers.

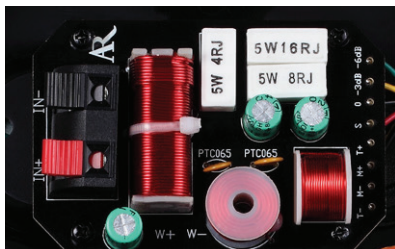

Each Invizibo models' custom AR crossover ensures high-fidelity, high-output and low-distortion merge as one. Along with our high-tech cones, AR's typically oversized woofer "motors" combine both power-handling and efficiency needed for today's multichannel systems.

NOT JUST "EASY" INSTALLATION ... *THE EASIEST*

Nothing wimpy in these speakers. AR's robust injection-molded mounting lock system kills vibration and allows quick, trouble-free installation in standard walls.

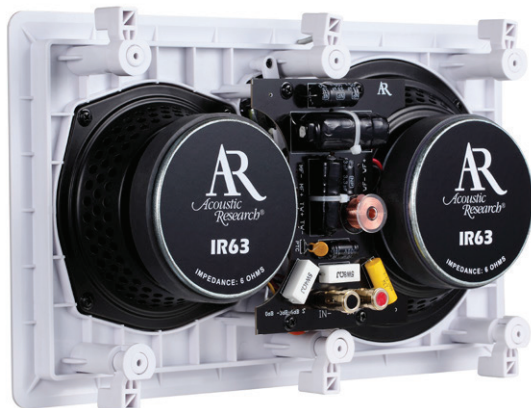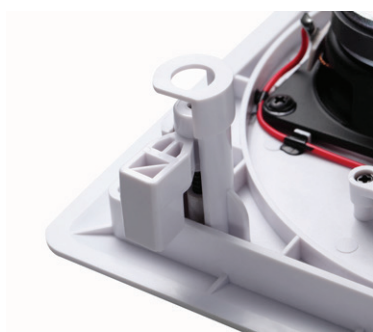


EVERY SPOT, EVERY ROOM, SOUNDS DIFFERENT.

THANKFULLY, AR DELIVERS DYNAMIC POWER AND LOW DISTORTION AUDIO ANYWHERE.

Here's how -- firstly, AR's Invizibo™ family includes five different In-Wall models, plus two innovative In-Ceiling speakers, all perfect for the latest Dolby Atmos® surround sound systems.


We'll help you find the perfect speaker for every location, and of course AR offers a wide array of subwoofers perfectly mated to the Invizibo line.

Because every spot in your home has a unique high frequency (HF) profile, our crossover designs allow specially tailored HF attenuation to mitigate harsh room response. With 0db (flat), -3DB, and -6db settings you get simple room correction at the source.

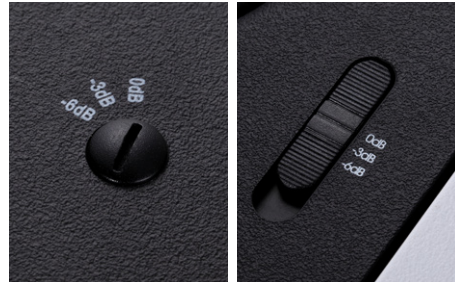

Make every seat a "sweet spot". Our unique Invizibo™ In-Ceiling speakers feature woofers angled a subtle but critical 15°. The woofers are coupled with advanced co-axial 36° swiveling tweeters to allow fine-tuned multi-channel imaging anywhere they're installed. Accurate, powerful and immersive audio has been AR's trademark for 60 years. Invizibo brings these legacy speakers that are practically invisible as well.

IR52 Adjustable Angle Frame
45° - 70° Rotation

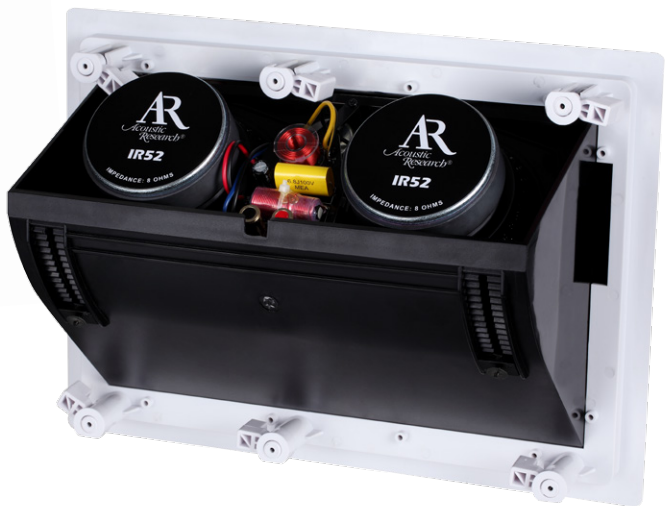

Placement of in-wall or in-ceiling speakers isn't always possible in the "correct" location -- AR's Model IR52 is a flexible 2-way solution. Its angled front baffle is adjustable from 45° to 70°. enhancing your room's sound stage, no matter where they're installed.

IS 5.1 HOME THEATER AUDIO BOX WITH 10" ACTIVE SUBWOOFER

**BUILD YOUR
HOME THEATER
WITH AR**



RADICALLY SMALL, RADICAL SOUND.

Both innovative and tried-and-true AR technology abounds in the petite Invizibo 5.1 audio system. Joining an advanced 3.5" full-range driver featuring a delicately balanced wool felt cone, is an overbuilt motor powered by a beefy 60mm-diameter magnet.

We think AR's subtle contemporary design is rather more stylish than your standard micro-speaker too. The curvaceous, AR air-suspension enclosures, are fist-sized wonders delivering what customers and audio critics all demand – balance, power and accuracy.

FLEXIBLY SMALL, FOR DISCREET PLACEMENT AND OPTIMAL SOUND

Whether they're beside your TV, discreetly tucked into a corner, the discreet IS30 speakers' low-profile style easily integrates into your home's décor both visually and acoustically. AR's stoutly built mounting brackets thoughtfully allow a virtual 360° swivel, for simple optimal acoustically correct placement anywhere in the room.



**360° angle
adjustable**

SEAMLESSLY INTEGRATED DEEP BASS

The RX-2010 sub is designed around an impressive long-throw 10" woofer, and paired with a gutsy, nicely featured 200 Watt digital amplifier. Tuned to deliver precise, dynamic in-room response to 28Hz or lower, it's anything but a "standard" subwoofer. This is bass you feel as much as hear.

That incredible depth makes integration with the IS30 speakers critical in the upper ranges naturally. So unsurprisingly our engineers ensured the high bass response of the RX subwoofer family yields a naturally seamless AR soundstage.



MODEL IR52
 2-WAY DESIGN Carbon fiber cone woofer /silk and aluminum dome tweeter
 TWEETER 1 x 25 mm
 MIDRANGE / WOOFER 2 x 5.25" woofer
 SENSITIVITY 90dB
 MAXIMUM POWER 110W
 IMPEDANCE 8Ω
 RECOMMENDED AMPLIFIER POWER 80 W
 FREQUENCY RESPONSE ± 3DB 55Hz-20kHz
 SPECIAL APPLICATION Adjustable frame
 DIMENSIONS (L x W x D) 381 x 275 x 155 mm
 MOUNTING DIMENSIONS (L x W x D) 351 x 245 x 148 mm
 NET WEIGHT 2.9 kg



MODEL IR83M
 3-WAY DESIGN Kevlar cone woofer/Kevlar midrange /silk dome tweeter
 TWEETER 1 x 25 mm
 MIDRANGE/WOOFER 1 x 4"midrange 1 x 8" woofer
 SENSITIVITY 92dB
 MAXIMUM POWER 200W
 IMPEDANCE 8Ω
 RECOMMENDED AMPLIFIER POWER 80W
 FREQUENCY RESPONSE ± 3DB 50Hz-25kHz
 SPECIAL APPLICATION High frequency controller 0/-3/-6dB
 DIMENSIONS (L x W x D) 357 x 255 x 104 mm
 MOUNTING DIMENSIONS (L x W x D) 324 x 222 x 91 mm
 NET WEIGHT 3.5 kg



MODEL IR63
 3-WAY DESIGN Kevlar cone woofer / paper cone midrange / silk dome tweeter
 TWEETER 1 x 25 mm
 MIDRANGE / WOOFER 1 x 5.25"midrange 1 x 6.5" woofer
 SENSITIVITY 91dB
 MAXIMUM POWER 120W
 IMPEDANCE 6Ω
 RECOMMENDED AMPLIFIER POWER 90W
 FREQUENCY RESPONSE ± 3DB 50Hz-20kHz
 SPECIAL APPLICATION High frequency controller 0/-3/-6dB
 DIMENSIONS (L x W x D) 360 x 210 x 93 mm
 MOUNTING DIMENSIONS (L x W x D) 330 x 180 x 85 mm
 NET WEIGHT 3.4 kg



MODEL IC62
 2-WAY DESIGN Kevlar cone/silk dome tweeter
 TWEETER 1 x 25 mm
 MIDRANGE/WOOFER 1 x 6.5" woofer
 SENSITIVITY 89dB
 MAXIMUM POWER 100W
 IMPEDANCE 8 Ω
 RECOMMENDED AMPLIFIER POWER 80W
 FREQUENCY RESPONSE ± 3DB 100Hz-20kHz
 SPECIAL APPLICATION Tweeter direction adjustable/
 High frequency controller 0/-3/-6dB/
 Adjustable frame
 DIMENSIONS (∅ x D) 244 x 138 mm
 MOUNTING DIMENSIONS (∅ x D) 220mm x 118 mm
 NET WEIGHT 1.6kg



MODEL IC82
 2-WAY DESIGN Kevlar cone/silk dome tweeter
 TWEETER 1 x 25 mm
 MIDRANGE/WOOFER 1 x 8"woofer
 SENSITIVITY 92dB
 MAXIMUM POWER 160W
 IMPEDANCE 8Ω
 RECOMMENDED AMPLIFIER POWER 80W
 FREQUENCY RESPONSE ± 3DB 100Hz-20kHz
 SPECIAL APPLICATION Tweeter direction adjustable/
 High frequency controller 0/-3/-6dB/
 Adjustable frame
 DIMENSIONS (∅ x D) 289 x 160 mm
 MOUNTING DIMENSIONS (∅ x D) 265 x 143 mm
 NET WEIGHT 2.8kg



MODEL	IS30
SATELLITE BOX UNIT	1x3.5" Full frequency
SENSITIVITY	92dB
MAXIMUM POWER	100W
IMPEDANCE	4Ω
RECOMMENDED AMPLIFIER POWER	50W
FREQUENCY RESPONSE ± 3DB	160Hz-20kHz
SPECIAL APPLICATION	Adjustable wall bracket
DIMENSIONS (L x W x D)	117x111x101 mm
NET WEIGHT	0.7kg



MODEL	RX-2010
SUBWOOFER	10 in. air-dried paper cone
CABINET DESIGN	Front firing rear ported
FREQUENCY RESPONSE ± 3DB	28Hz-240Hz
AMPLIFIER POWER - RMS	200W
AMPLIFIER POWER - DYNAMIC	450W
CROSSOVER ADJUSTMENT	40Hz-200Hz
PHASE ADJUSTMENT	0-180°
AUTO ON/OFF	Yes
CONNECTION	Speaker level inputs, Line inputs
DIMENSIONS (H x W x D)	309 x 296 x 330 mm
NET WEIGHT	9.28kg

