DIREKT



DIREKT








DIREKT



DIREKT



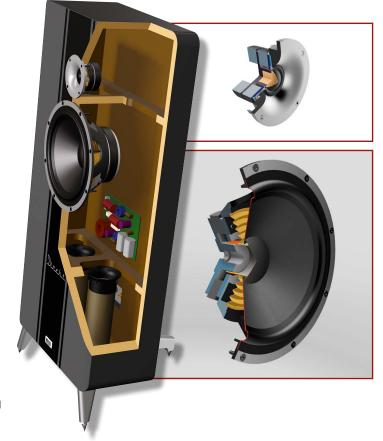

HIGHLIGHTS

High-end high-efficiency two-way floor-standing loudspeakers

- Large two-way system with particularly high efficiency for excellent dynamics
- Can be combined optimally with transistor and tube amplifiers from 10 watts per channel
- Attractive flat-design enclosure, floating appearance through all-metal design foot construction

Chassis

- Newly developed tweeter with particularly high efficiency through the 28mm silk compound cone, solid aluminium front panel with high-efficiency wave-control horn geometry and powerful double magnet system
- Especially efficiency and gentle roll-off-optimized woofer midrange with Kraft paper diaphragm, lightweight dust-protection cone, low-loss rubber surround and highly durable voice coil in a stable die-cast aluminum cage
- Magnet systems linearized with the high-tech Klippel measuring system for ideal symmetry and minimal distortions

Cabinet

- Stylish semi-matt lacquer finish with contrasting double stripes on the front
- Solidly built, multiple strutted MDF flat enclosure with attractive curves
- Specially designed all-metal foot construction for an absolutely stable base, three-point mounting for perfect weight distribution
- Floor-protecting rubber feet and all-metal spikes included
- Double bass-reflex design with bi-directional airflow-optimized rounded downfire tubes for maximum bass effect

Crossover

- Elaborate, phase-optimized crossover with highquality tight-tolerance components
- Linearized impedance curve with very little fluctuation for optimum behavior on tube and transistor amplifiers from 10 watts per channel
- High-quality all-metal connector terminal with stable, gold-plated high-end screw terminals



Direkt

Principle Equipment

Power Handling (RMS/Max)
Impedance
Frequency Response
Crossover Frequencies
Recommended Amplifier Output
Sensitivity
Cabinet surface
Dimensions (WxHxD)

Weight

Black & Black White & Silver 2 way bass reflex
11" woofer-midrange
1.2" dome-tweeter
200/320 W
4 - 8 Ω
25 - 28.000 Hz
2.350 Hz
10 - 320 W
95 dB
Black & Black, White & Silver
Cabinet 440 x 900 x 200 (230 incl. Terminal) mm
Incl. foot construction 440 x 998 x 397 mm
25,8 kg

Art. No. 135 0700 EAN: 40 29678 50700 6 Art. No. 135 0702 EAN: 40 29678 50702 0

